



SL SERIES SPECIFICATIONS		SL-6	SL-8	SL-10	SL-12
MACHINE CAPACITY	Swing Over Bed	14"	20"	24"	28"
	Max Turning Diameter	12"	12"	14"	18"
	Working Length	9.0"	16" (24", 46")	24" (46", 80")	
	Distance Between Centers	N/A	19" (27", 51")	27" (51", 83")	
	Cross Slide Travel (X)	7.5"	7.5"	8.5"	11"
	Longitudinal Travel (Z)	9.5"	16" (24", 48")	24" (46", 80")	
	Number of Turret Positions	8	12	12	
	Turret Tooling Size	3/4" BOT (VDI-30)	1" BOT (VDI-30, BMT-45)	1" BOT (VDI-40, BMT-55)	
	Turret Index Time (one tool)	1 sec	1 sec	1 sec	
SPINDLE	Spindle Nose	A2-5	A2-6	A2-8	
	Spindle Bore	2.2"	2.4"	3.4"	4.17"
	Bar Capacity	1.75"	2.0" (3.0")	3.0" (3.6")	3.6"
	Hydraulic Chuck Size	6"	8" (10")	10" (12")	12" (15")
	Spindle Speed Max (RPM)	6,000	4,200	3,500	3,000
	Spindle HP (Peak)	20	30	40	40
TAILSTOCK	Quill Travel	N/A	4.0"	4.0"	4.0"
	Quill Diameter	N/A	3.15"	3.15"	4.15"
	Quill Taper Hole	N/A	MT-4	MT-4	MT-5
PERFORMANCE	Positioning Accuracy	+/-0.00010"			
	Positioning Repeatability	+/-0.00005"			
	Rapid Traverse (X,Z)	1,200 IPM			
	Servo Type	AC Digital Brushless			
	Axis Thrust (Peak)	3,360 lbs. X, Z	6,360 lbs. X, Z	6,360 lbs. X, Z	10,732 lbs. X, Z
GENERAL INFO	Coolant Capacity	40 Gallons			
	Coolant Flow	5 GPM			
	Power Requirements	40 AMP	40 AMP	80 AMP	80 AMP
	Voltage Requirements	430-500 VAC 3 PHASE (205-245 VAC Optional)			
	Shipping Dimensions* (WxDxH)	70"x50"x60"	90"x69"x70"	108"x69"x70"	128"x69"x70"
	Operating Dimensions (WxDxH)	70"x50"x60"	90"x69"x70"	108"x69"x70"	128"x69"x70"
	Machine Weight	5,500 lbs.	11,500 lbs.	14,500 lbs.	16,000 lbs.

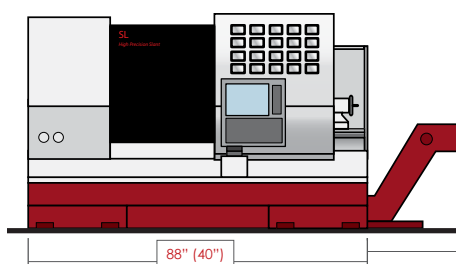

	SL-6	SL-8	SL-10	SL-12
Overall Width (A)	70"	90"	108"	128"
Overall Depth (B)	50"	69"	69"	69"
Maximum Height (C)	60"	70"	70"	70"
Door Opening Width (D)	59"	34"	31"	59"
Side Door - Width x Height (E)	30"x30"	27"x34"	30"x30"	30"x30"
Side Door Swing (F)	N/A	29.5"	N/A	N/A
Electrical Cabinet Swing (G)	38"	34"	38"	38"
Approximate Machine Weight (H)	5,500 lbs.	11,500 lbs.	14,500 lbs.	16,000 lbs.

* Requires some disassembly to meet these minimum dimensions. Contact factory for more information.

© 2019 Fryer Machine Systems, Inc. rev 050219
Specifications subject to change without prior notice.